

Data Sheet

# Pressure transmitter Type **MBS 1700** and **MBS 1750**

For general purpose



The compact pressure transmitters MBS 1700 and MBS 1750 are designed for use as a general purpose transmitter, and offers a reliable pressure measurement, even under harsh environmental conditions.

The version MBS 1750 with integrated pulse-snubber is designed for use in applications with severe medium influences like cavitation, liquid hammer or pressure peaks and offers a reliable pressure measurement, even under harsh environmental conditions.

Excellent vibration stability, robust construction, and a high degree of EMC / EMI protection equip the pressure transmitter to meet the most stringent industrial requirements.


### Features

- Enclosure and wetted parts of acid-resistant stainless steel (AISI 316L)
- Pressure ranges in relative (gauge) from 0 – 25 bar
- Output signal: 4 – 20 mA
- Pressure connections:
  - G 1/4A & G 1/2A EN837 (MBS 1700)
  - G 1/4 DIN 3852-E, Gasket DIN 3869-15 (MBS 1750)
- Fully digitally compensated

## Application

### **Application and media conditions (MBS 1750)**

Figure 1: MBS 1750

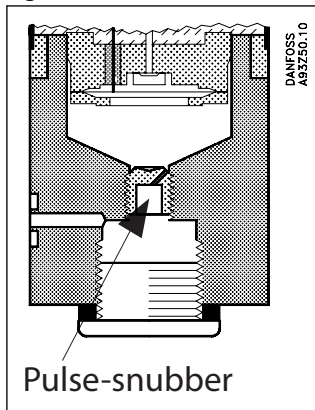

#### **Application**

Cavitation, liquid hammer and pressure peaks may occur in liquid filled systems with changes in flow velocity, e.g. fast closing of a valve or pump starts and stops. The problem may occur on the inlet and outlet side, even at rather low operating pressures.

#### **Media condition**

Clogging of the nozzle may occur in liquids containing particles. Mounting the transmitter in an upright position minimizes the risk of clogging, because the flow in the nozzle is limited to the start-up period until the dead volume behind the nozzle orifice is filled. The media viscosity has only little effect on the response time. Even at a viscosities up to 100 cSt, the response time will not exceed 4 ms.

## Product specification

### Technical data

**Table 1: Performance (EN 60770)**

Features	Description
Accuracy (incl. non-linearity, hysteresis and repeatability)	$\leq \pm 0.5\%$ FS (typ.)
	$\leq \pm 1.0\%$ FS (max.)
Non-linearity BFSL (conformity)	$\leq \pm 0.2\%$ FS
Hysteresis and repeatability	$\leq \pm 0.1\%$ FS
Thermal zero point shift	$\leq \pm 0.1\%$ FS/10K (typ.)
	$\leq \pm 0.2\%$ FS/10K (max.)
Thermal sensitivity (span) shift	$\leq \pm 0.1\%$ FS/10K (typ.)
	$\leq \pm 0.2\%$ FS/10K (max.)
Response time	Air and gases (MBS 1700)
	Air and gases (MBS 1750)
Overload pressure (static)	$< 4$ ms
Burst pressure	$< 35$ ms
Power-up time	$6 \times$ FS (max. 1500 bar)
Durability, P: 10 – 90% FS	$6 \times$ FS (max. 2000 bar)
	$< 50$ ms
	$> 10 \times 10^6$ cycles

**Table 2: Electrical specifications**

Features	Description
Nom. output signal (short-circuit protected)	4 – 20 mA
Supply voltage [ $U_b$ ], polarity protected	9 – 32 V d.c.
Supply – current consumption	–
Supply voltage dependency	$\leq \pm 0.1\%$ FS/10 V
Current limitation	22.4 mA (typ.)
Output impedance	–
Load [ $R_L$ ] (load connected to 0 V)	$R_L \leq (U_b - 9 \text{ V})/0.02 \text{ A} [\Omega]$

**Table 3: Environmental conditions**

Features	Description
Sensor temperature range	Normal
media temperature range	-40 – 85 °C
Ambient temperature range	-40 – 85 °C
Compensated temperature range	0 – 80 °C
Transport / storage temperature range	-50 – 85 °C
EMC – Emission	EN 61000-6-3
EMC – Immunity	EN 61000-6-2
Insulation resistance	$> 100 \text{ M}\Omega$ at 100 V
Mains frequency test	Based on SEN 361503
Vibration stability	Sinusoidal
	Random
Shock resistance	Shock
	Free fall
Enclosure	IP65

**Table 4: Mechanical characteristics**

<b>Materials</b>	Wetted parts	EN 10088-1; 1.4404 (AISI 316 L)
	Enclosure	EN 10088-1; 1.4404 (AISI 316 L)
	Electrical connections	Glass filled polyamid PA 6.6
<b>Net weight</b>		0.25 kg

## Guideline for installations at high media temperature

Figure 2: installations at high media temperature


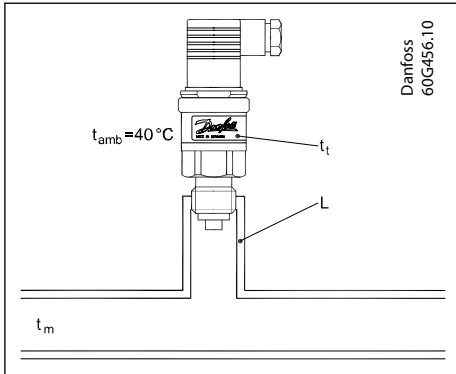


Table 5: Electrical connections

Medium temperature (t <sub>m</sub> ) 120 °C	
Heat isolator (L)	Transmitter temperature (t <sub>t</sub> )
2 cm	85 °C
5 cm	75 °C
10 cm	70 °C

## Dimension

Figure 3: Dimension

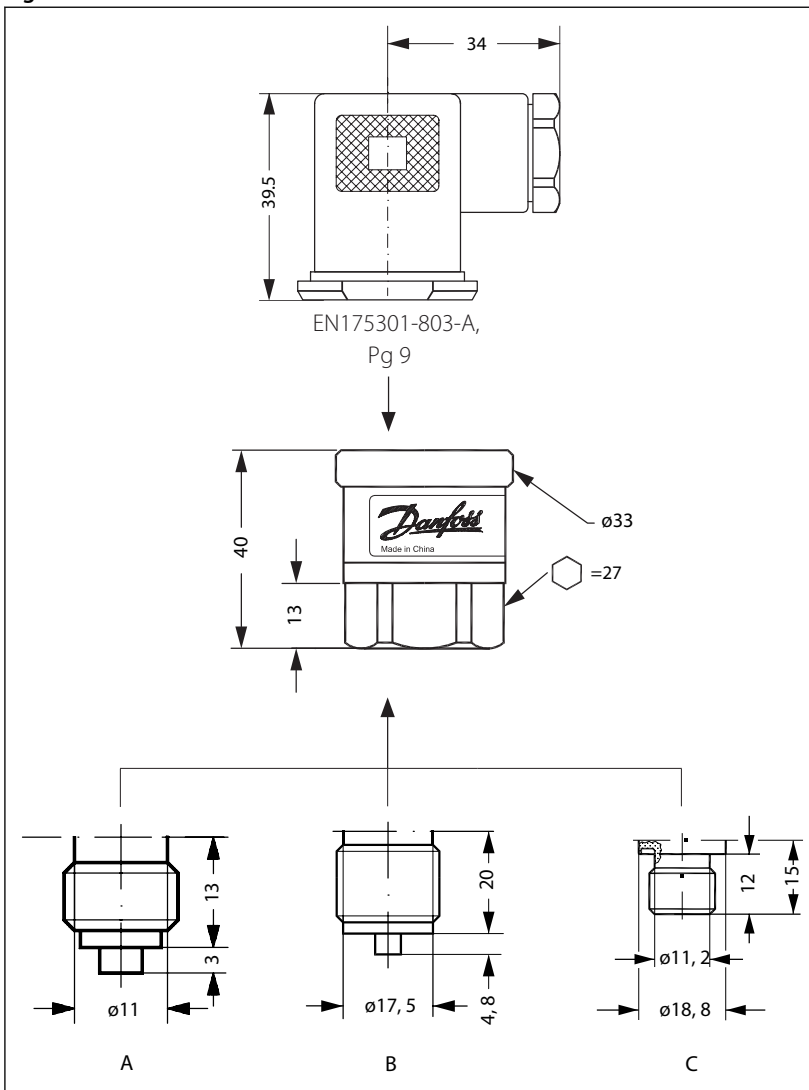

## Pressure transmitter, Type MBS 1700 and MBS 1750

<b>A</b>	G 1/4 A (EN 837)(MBS 1700)
<b>B</b>	G 1/2 A (EN 837)(MBS 1700)
<b>C</b>	G 1/4 (DIN 3852-E) Gasket DIN 3869-14-NBR(MBS 1750)


**Table 6: Torque Specification**

Type code	MBS 1700	MBS 1750
Recommended torque <sup>(1)</sup>	30 – 35 Nm	30 – 35 Nm


<sup>(1)</sup> Depends on different parameters as packing material, mating material, thread lubrication and pressure level

## Electrical connection

**Figure 4: EN 175301-803-A,**

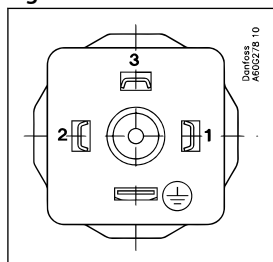

**Table 7: Electrical connections**

Type code	A1
Ambient temperature	-40 – 85 °C
Enclosure (IP protection fulfilled together with mating connector)	IP65
Material	Glass filled polyamid, PA 6.6
Electrical connection, 4 – 20 mA output (2 wire)	Pin 1: + supply Pin 2: ÷ supply Pin 3: Not used  Earth: Connected to MBS enclosure

## Ordering

**Table 8: Plug; Pg 9 (EN 175301-803-A)**

Measuring range P <sub>e</sub> <sup>(1)</sup> [bar]	Output signal	Pressure connection	Code No.
0 – 6	4 – 20 mA	G ¼ A EN 837	060G6100
0 – 10			060G6101
0 – 16			060G6102
0 – 25			060G6103
0 – 6			060G6104
0 – 10		G ½ A EN 837	060G6105
0 – 16			060G6106
0 – 25			060G6107

<sup>(1)</sup> Relative / gauge

**Table 9: Plug; Pg 9 (EN 175301-803-A)**

Measuring range P <sub>e</sub> <sup>(1)</sup> [bar]	Output signal	Pressure connection	Code No.
0 – 60	4 – 20 mA	DIN 3852-E G ¼ Gasket DIN 3869-14	060G6108
0 – 100			060G6112
0 – 160			060G6109
0 – 250			060G6110
0 – 400			060G6111

<sup>(1)</sup> Sealed gauge

## Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at [danfoss.com](http://danfoss.com) or contact your local Danfoss representative if you have any questions.

**Table 10: Valid approvals**

File name	Document type	Document topic	Approval authority
OC.C.30.004.A 59728-1	Measuring - Performance Certificate		GOST
060R9400.02	EU Declaration	EMCD/ROHS	Danfoss
060R3160.00	Manufacturers Declaration	China RoHS	Danfoss
064R9402.00	Manufacturers Declaration	PED	Danfoss
UL E494625	Electrical - Safety Certificate		UL

## Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

### The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at [store.danfoss.com](https://store.danfoss.com).

### Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at [www.danfoss.com/en/service-and-support/documentation](https://www.danfoss.com/en/service-and-support/documentation).

### Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at [www.danfoss.com/en/service-and-support/learning](https://www.danfoss.com/en/service-and-support/learning).

### Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: [www.danfoss.com/en/choose-region](https://www.danfoss.com/en/choose-region).

### Spare Parts



Get access to the Danfoss spare parts and service kit catalog right from your smartphone. The app contains a wide range of components for air conditioning and refrigeration applications, such as valves, strainers, pressure switches, and sensors.

Download the Spare Parts app for free at [www.danfoss.com/en/service-and-support/downloads](https://www.danfoss.com/en/service-and-support/downloads).