

## Dial Thermometers - TE 063



- Bi-Metals are made of two different metal sheet layers and a spiral form is given ,as the metals expansion rates differ from each other , due to these factors it spins upwards around its axis by heat.By a transmission wire this movement it is transmitted to the pointer.
- Used where no high accuracy is needed.
- Cookers, Plastic Injection Machinery,Coffee Machines,etc.





### Usage Properties

Conformity	· EN 13190
Accuracy Class	· CL 2.0
Protection Rate	· IP 51
Storage Temperature	· -40 ... +70 °C

### Constructive Properties

Mounting Type	· Back Connection
Scale Unit	· °C
Scale Range (T)	· -30/+60°C · 0/+60°C · 0/+120°C · 0/+160°C · · · 0/+300°C · 0/+350°C · 0/+400°C · 0/+500°C
Case	· Stainless Steel AISI-430
Bezel	· Stainless Steel AISI-430
Window	· ≥ 160°C Glass · < 120°C Polycarbonate
Connection	· G 1/2" B
Dial	· Aluminum
Pointer	· ≤ 160 °C Plastic · ≥ 200 °C Aluminum
Temperature Element	· Bi-metal
Bi-Metal Stem	· Brass
Thermowell	· Stainless Steel AISI-316
Immersion Length	· 50mm · 100mm · 150mm · 200mm

**Technical Drawings - TE 063**

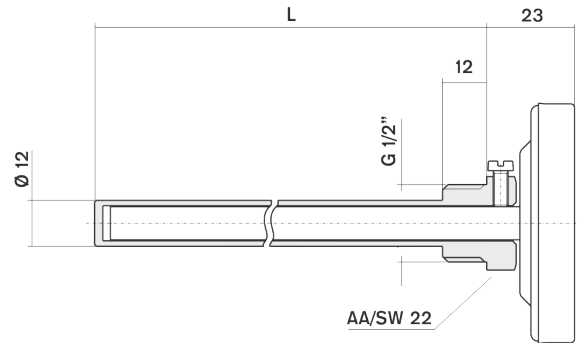

- |        |         |         |         |         |         |         |         |         |          |
|--------|---------|---------|---------|---------|---------|---------|---------|---------|----------|
| L = 50 | L = 100 | L = 150 | L = 200 | L = 250 | L = 300 | L = 400 | L = 500 | L = 700 | L = 1000 |
|--------|---------|---------|---------|---------|---------|---------|---------|---------|----------|

063402 /